




ULTRA-THIN FAN COILS

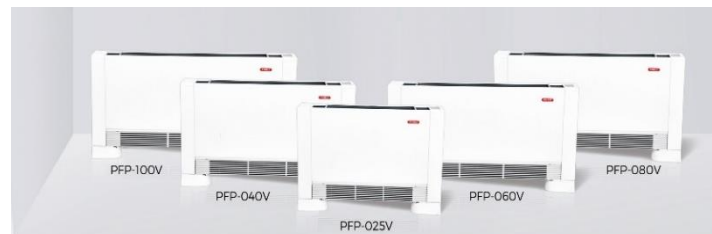

SPECIFICATIONS

Model	PFP-025V	PFP-040V	PFP-060V	PFP-080V	PFP-100V
Heating Capacity* (Btu/h)	3,600	6,900	9,200	11,800	14,300
Heating Capacity** (Btu/h)	4,600	8,500	11,400	14,600	17,800
Heating Capacity*** (Btu/h)	6,680	10,500	15,300	19,720	25,500
Cooling Capacity (Btu/h)	3,400	6,500	8,500	12,000	14,800
Power Supply (V/Ph/Hz)	110 - 120 V / 1 Ph / 60Hz				
Air Volume (CFM)	94	188	270	341	383
Max. Noise (dBA)	30	32	37	39	41
Net Dimensions (H x W x D) (in)	26 x 28 x 5	26 x 35 x 5	26 x 43 x 5	26 x 51 x 5	26 x 59 x 5
Shipping Dimensions (H x W x D) (inches)	29 x 29 x 7	29 x 37 x 7	29 x 45 x 7	29 x 53 x 7	29 x 61 x 7

*Heating: Ambient temp. (DB) 70°F, Water temp. (In/Out): 113°F/ -

**Heating: Ambient temp. (DB) 70°F, Water temp. (In/Out): 122°F/ -

***Heating: Ambient temp. (DB) 70°F, Water temp. (In/Out): 140°F/ -

Cooling: Ambient temp. (DB) 80°F/67°F, Water temp. (In/Out): 45°F/55°F

In keeping with our policy of continuous product improvement, PHNIX reserves the right to make specification and design changes without notice.